

OCEANAIRE

MODEL: OWC6034
5 TON DELUXE PORTABLE
WATER-COOLED AIR CONDITIONER

TECHNICAL SPECIFICATIONS

COOLING CAPACITY	60,100 BTUH
VOLTAGE	460V, 60Hz, 3PH
AMPS	6.3
TOTAL WATTS	5000
IN RUSH AMPS	75
PLUG TYPE	L16-20P
EER	12.0
COMPRESSOR	SCROLL
COMPRESSOR HP	5
COMPRESSOR LRA	62
EVAP CFM - HIGH	1950
EVAP MOTOR HP	1
CONDENSER WATER FLOW	
AT 60°F WATER IN	3.8 GPM
AT 85°F WATER IN	15 GPM
WATER LINE CONNECTIONS	
WATER IN	5/8 MF
WATER OUT	5/8 MF
DRAIN	3/8 MF
CONDENSATE REMOVAL	PUMP AUTOMATIC 20' VERTICAL LIFT
REFRIGERANT CHARGE	52 oz R-410A
HEIGHT	51-1/2 in
WIDTH	27 in
DEPTH	29 in
NET WEIGHT	410 lb

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- ⓘ **Cooling Capacity** is total BTUH at 80°DB/67°WB return air with 85°EWT and 105°LWT
- ⓘ Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- ⓘ EER is determined at high fan speed
- ⓘ CFM with free discharge
- ⓘ Amps & Watts at 460 Volts

COOLING AMBIENT **OPERATING RANGE 65° TO 105°**
NOT APPROVED FOR OUTDOOR USE



WATER COOLED



Cooling done Right!
OCEANAIRE

OCEANAIRE-INC.COM
OA-TS-OWC6034-05012020

OCEANAIRE


MODEL: OWC6034
5 TON DELUXE PORTABLE
WATER-COOLED AIR CONDITIONER

PRODUCT FEATURES

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT
- OA WATER REGULATING VALVE
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTER
- OA THREE PHASE MONITOR



ACCESSORIES

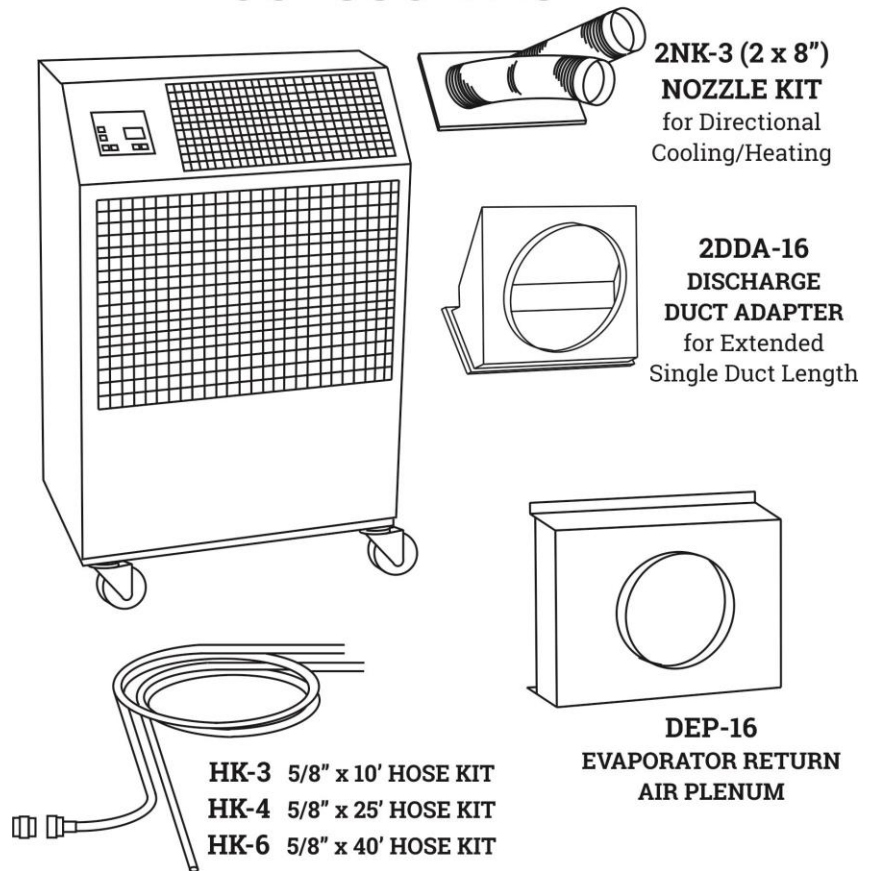

Cooling done Right!
OCEANAIRE

OCEANAIRE-INC.COM
OA-TS-OWC6034-05012020